


# UV-S30

UV DTF PRINTER



Self-development

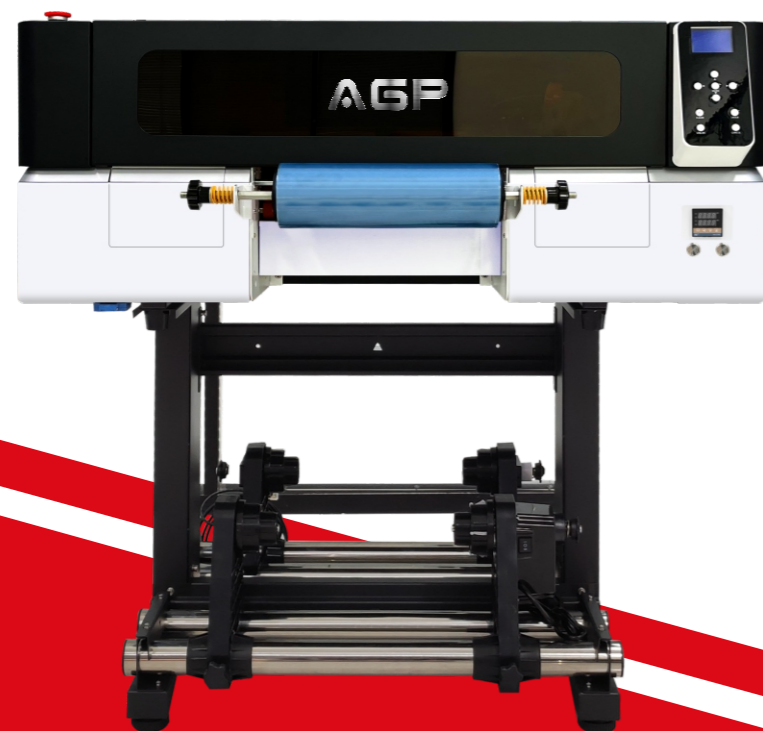

long life



High precision



low cost

## TECHNICAL PARAMETER

|                       |  |   |
|-----------------------|--|---|
| Model                 | UV-S30                                 |   |
| Printhead             | 3*Epson F1080/11600-U1                 |   |
| Printing Color        | CMYK+W+V                               |   |
| Printing Size         | 300mm                                  |   |
| Printing Speed        | 11600-U1                               | 720*900DPI 6PASS 4m <sup>2</sup> /h<br>720*1200DPI 8PASS 3m <sup>2</sup> /h<br>720*1800DPI 12PASS 2m <sup>2</sup> /h      |
|                       | F1080                                  | 720*540DPI 6PASS 2.3m <sup>2</sup> /h<br>720*720DPI 8PASS 1.8m <sup>2</sup> /h<br>720*1080DPI 12PASS 1.3m <sup>2</sup> /h |
| RIP Software          | RIIN/Flexiprint/CADlink/Maintop        |   |
| Media Transfer        | UV AB film                             |   |
| Lamination            | Integrated automatic laminator         |   |
| Ink curing            | LED curing                             |   |
| Power Supply          | 220V 50~60HZ 400W                      |   |
| Work Environment      | Temperature:20°C~30°C Humidity:35%~65% |   |
| Machine Size/Weight   | 1170*962*1218mm 150kg                  |   |
| Packaging Size/Weight | 1570*880*740mm 168kg                   |   |



CMYK+W+V



Varnish stirring



HIWIN guide rail



Feed-in system